

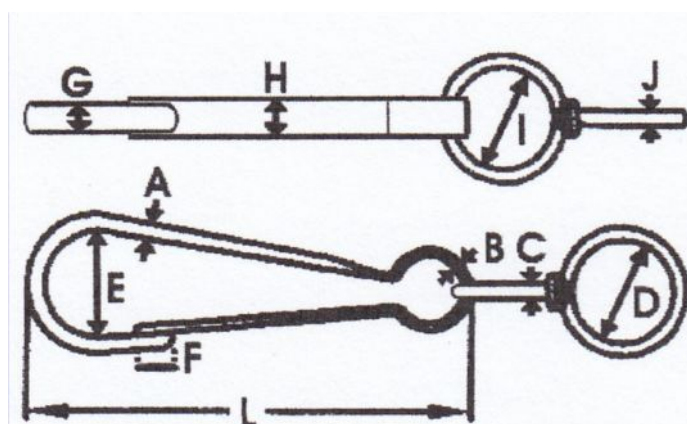
TECHNICKÉ PARAMETRE TECHNICAL PARAMETERS

SPONA SO ZVRTLÍKOM SIMPLEX HOOK

DODÁVATEĽ / SUPPLIER

ORVEX, spol. s r.o.
Klíňanská cesta 1225
029 01 Námestovo
Slovenská republika

Tel.: +421 43 5523371-3
Fax: +421 43 5522986
www.orvex.com


**KONTROLNÉ ČÍSLO
CONTROL NO.**
35/GM/2009

ROZMER SIZE (L)	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	J [mm]	Pracovné zaťaženie Working load [kg]	Váha/ks Weight/ks [kg]
30 mm	1,7	0,8	2	9	7	3	3	4,5	6	1,5	3	0,004
40 mm	2	1	2,4	11	8,5	4	4	5,5	8	2	5	0,007
50 mm	2,5	1,2	2,7	13,5	10,5	6	5	6,7	9	2,2	10	0,013
60 mm	3,3	1,5	3,5	15	12,5	6	6	8	11	2,5	15	0,023
70 mm	3,5	1,5	3,3	15	14	9	7,3	9,5	12	2,5	20	0,030
80 mm	3,8	1,8	4	18	16	11	8	11	16	3	25	0,044
90 mm	4,2	2	3,5	15,5	17	14	8,5	11	20	4,5	30	0,061
100 mm	5	2	3,5	16	18	10	10	12	20	4,5	35	0,079
120 mm	6	3	4	18	19	10,5	11	13	20,5	5	40	0,129

MATERIÁL / MATERIAL
C10 (Mn+Si)
KRYTIE / COVERING
zinok / galv.

Tolerancia rozmerov +/- 5 %
Dimension tolerance +/- 5 %

**TENTO DOKUMENT JE URČENÝ PRE INFORMATÍVNE ÚČELY.
ORIGINAL JE K DISPOZÍCII V SÍDLE SPOLOČNOSTI
ORVEX, SPOL. S R.O.**

THIS DOCUMENT IS FOR INFORMATIVE PURPOSES ONLY. THE
ORIGINAL IS AVAILABLE IN HEADQUARTER OF COMPANY ORVEX,
SPOL. S R.O.

DÁTUM / DATE

01.01.2010